

POENG FOR BRUK DYNAVAL 150L/MIN



- Mekanisk mengdemåler - Lavtrykk
- Montering på regulatoren eller ledningsnett
- Egnet for industrigasser
- Laget av lettmetall

Industrial Process

Domains of applications

Designed for implementation of:
industrigasser

Specifications

Maximal inlet pressure at 15°C 3.5 bar
Adjustable flow to 0 to 150 l/min
Maximal flow 150 l/min


Dimensions

Length (L) : 56 mm

Height (H) : 121 mm

Depth (D) : 61 mm

Net weight : 0.4 kg

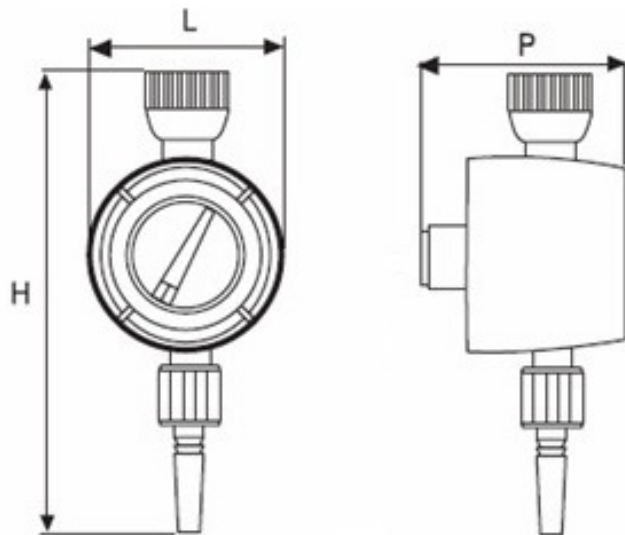

Operating instructions

OP 440 - Dynaval

Connection

Inlet connection: En innløpsport G 3/8 BSPP hann

Outlet connection: En utløpsport M 12 x 125 hann