

# POENG FOR BRUK DYNAVAL 20L/MIN



- Mekanisk mengdemåler - Lavtrykk
- Montering på regulatoren eller ledningsnett
- Egnet for industrigasser
- Laget av lettmetall

Industrial Process

## Domains of applications

Designed for implementation of:  
industrigasser

## Specifications

Maximal inlet pressure at 15°C ..... 3.5 bar  
Adjustable flow to ..... 0 to 20 l/min  
Maximal flow ..... 20 l/min


# Dimensions

**Length (L)** : 56 mm

**Height (H)** : 121 mm

**Depth (D)** : 61 mm

**Net weight** : 0.4 kg

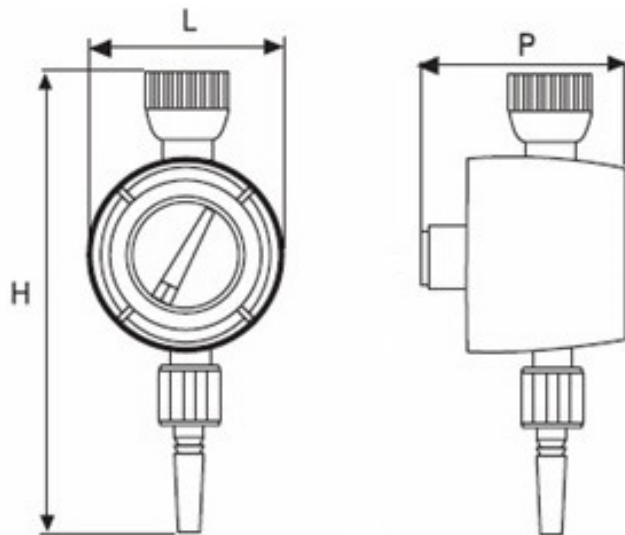

# Operating instructions

OP 440 - Dynaval

# Connection

**Inlet connection:** En innløpsport G 3/8 BSPP hann

**Outlet connection:** En utløpsport M 12 x 125 hann